

PCS Shower Enclosures Luxurious Bathing Environments



Luxurious showering experience

Standard and Bespoke
enclosures available

Tile Ready surface

Easy to install in one day

Product Overview

CNC machined panels are manufactured from solid polystyrene and coated with a special polymer modified reinforced cement coating.

Each enclosure is supplied as a modular unit that is rigid and robust and easy to install. A concealed service void for the secure fixing of pipes and mixer valves is built within the panelling.

Simply erect the panels, waterproof the joints, install your shower hardware and tile.

Applications

- Bathrooms
- Gym and Health Clubs
- Wetroom and Spa environments
- Poolside

Curved Naturally!

Controlled and dimensionally accurate panels manufactured to specific curves and radii.


Conventional materials such as square block or angular timber usually mean a compromise in the surface finish. With a PCS enclosure "curved" means "precision curved"

Please contact head office for more info:

T: +44 (0) 844 335 1136

F: +44 (0) 1942 246 706


www.pcsboard.com

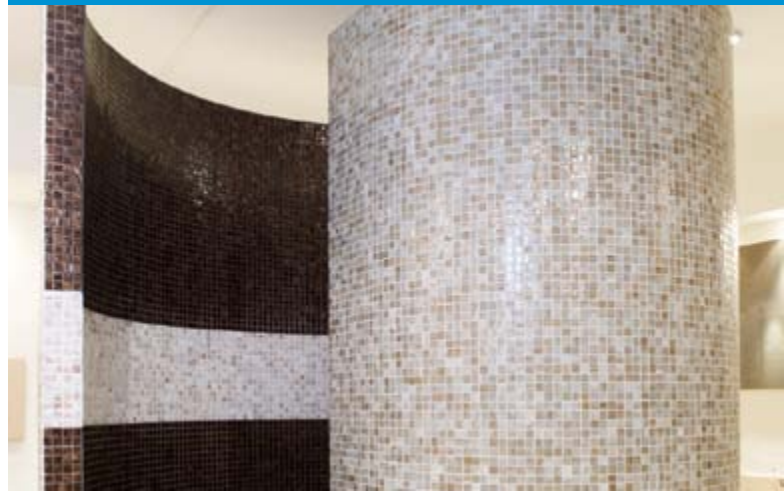

PCS Shower Enclosures

Round Shower Enclosure




Technical Specification

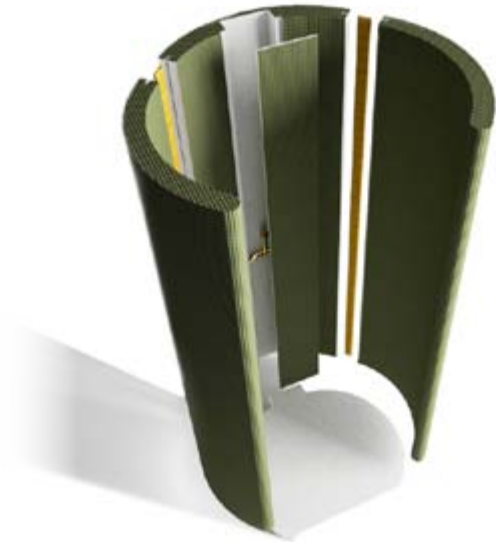

Properties

Properties	Value
Compressive Strength	300 kpa
Thermal Conductivity <i>tested to BSEN 13164</i>	0.033 W/Mk
Water Absorption <i>by volume tested to BSEN 12087</i>	0.6%
Temperature Range	-50°C, +75°C
Fire Performance	Class 0

BS 476 part 6.7
Surface spread of flames

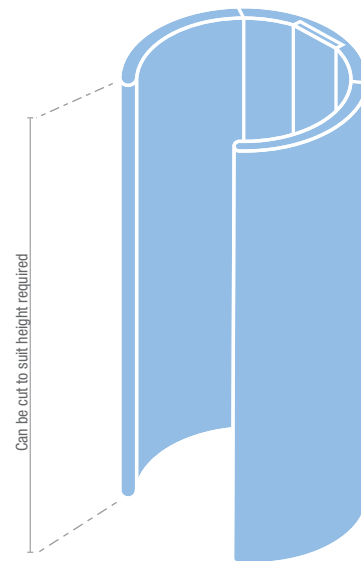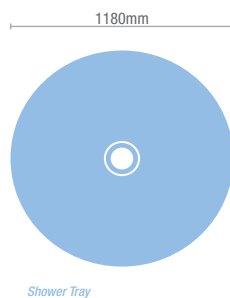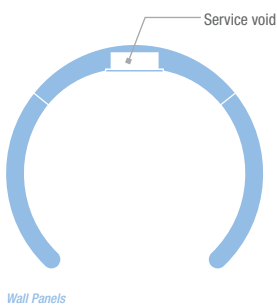

Tiling Requirements

Tray Surface Area	0.9m ²
Internal Wall Surface Area	5.3m ²
External Wall Surface Area	6.4m ²

Product ID

Descriptions

Details

H0010	2no. pre curved wall panels 1no. pre curved wall panel with concealed services void 1no. tilebacker cover plate 1no. base template for accurate positioning of panels	Panel Height - 2400mm Service void depth - 75 mm Panel Thickness 82mm - 116mm
G0136	1no. wall panel fixing kit	
G0129	1no. Round shower tray to fit Round Shower Enclosure	
G0135	1 no tray fixing kit (includes drain body)	

Please contact head office for more info:


T: +44 (0) 844 335 1136 F: +44 (0) 1942 246 706

www.pcsboard.com

PCS Shower Enclosures

Spiral Shower Enclosure



Technical Specification

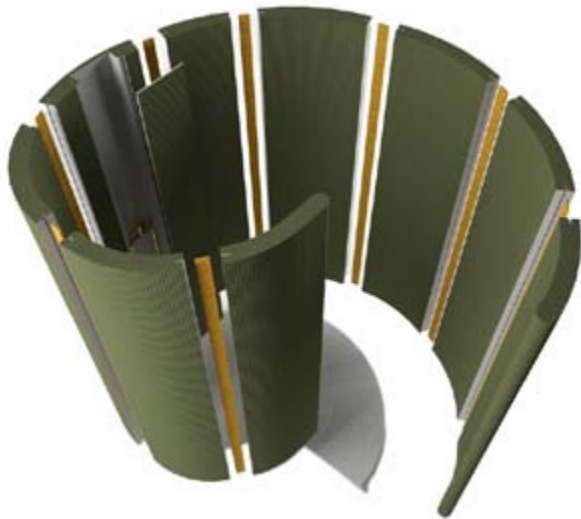

Properties

Properties	Value
Compressive Strength	300 kpa
Thermal Conductivity <i>tested to BSEN 13164</i>	0.033 W/Mk
Water Absorption <i>by volume tested to BSEN 12087</i>	0.6%
Temperature Range	-50°C, +75°C
Fire Performance	Class 0

BS 476 part 6.7
Surface spread of flames

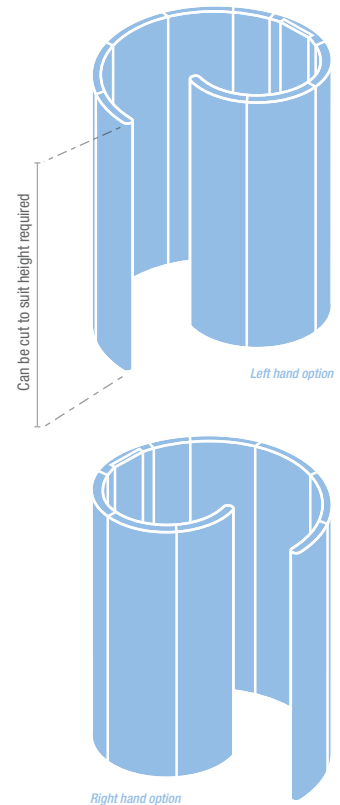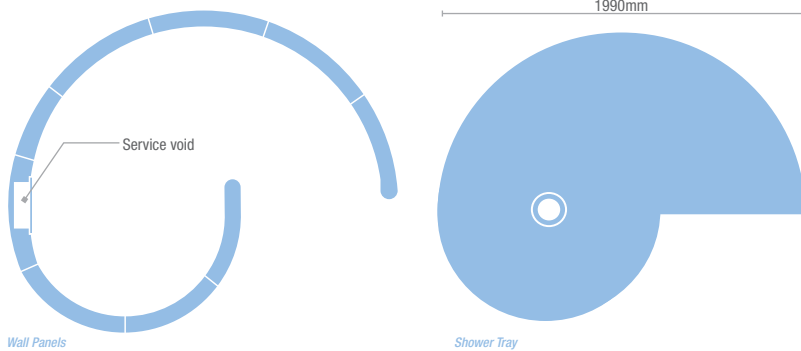


Tiling Requirements

Tray Surface Area	1.5m ²
Internal Wall Surface Area	11.04m ²
External Wall Surface Area	12.6m ²

Product ID	Descriptions	Details
H0030	8no. pre curved wall panels 1 no pre curved wall panel with concealed services void 1 no tilebacker cover plate 1 no base template for accurate positioning of panels	Panel Height - 2400mm Service void depth - 75 mm Panel Thickness 82mm - 116mm
G0137	1no. wall panel fixing kit	
G0150	1no. Spiral shower tray to fit Spiral Shower Enclosure	
G0135	1 no tray fixing kit (includes drain body)	

PCS Shower Enclosures Bespoke Shower Enclosures

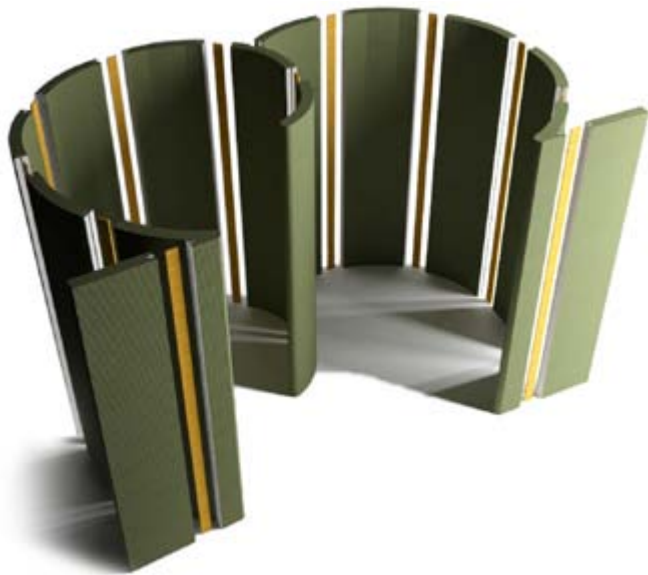

Self-supporting lightweight structures

Modular systems

Individually designed

Easy to install

Tile ready surface

Product Overview

PCS will work with clients specifications to create functional and practical solutions to create stunning wellness environments.

The system provides a lightweight watertight robust structure designed with concealed support structures for the secure fixing of all services and hardware

PCS pre fabricated bespoke shower enclosures are uniquely individual

Please contact head office for more info:


T: +44 (0) 844 335 1136

F: +44 (0) 1942 246 706

www.pcsboard.com

Amazing Showers!

By manufacturing and pre-assembling our structures in our factory we ensure that installation time on site is greatly minimised and many of the quality issues associated with site work are eliminated.

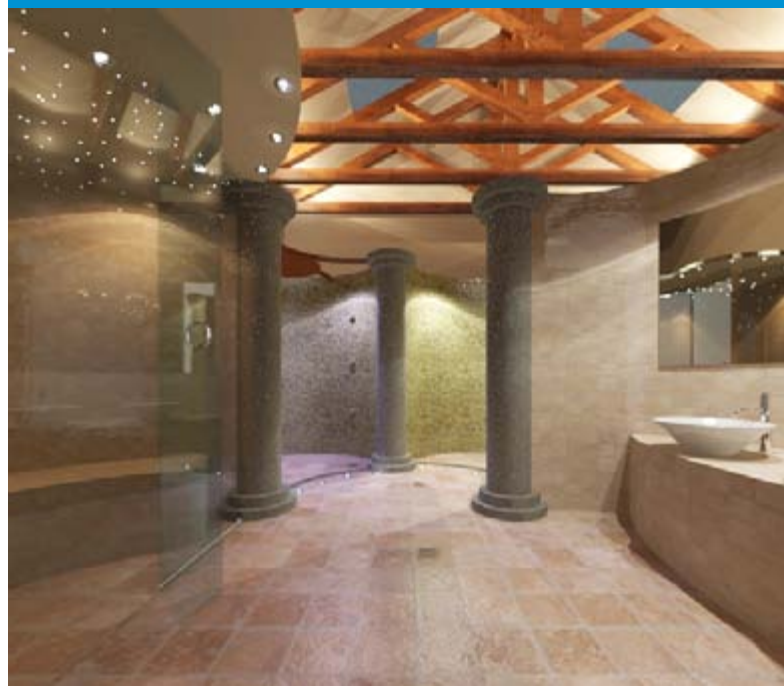

PCS Spa Structures Bespoke Shower Enclosures



Bespoke Shower Room

Location

Private residential

Design Criteria

Luxury bathing environment incorporating showers, steamroom, dressing room and WC.

Installation Time - 7 days *(guide only)*



Poolside Shower Experience

Location

Private Health Club

Design Criteria

Single shower bathing environment incorporating Duche shower, bodyjets, overhead spray and power dryer

Installation Time - 2 days *(guide only)*



Triple Shower


Location

Local Authority Sports Centre

Design Criteria

3 person bathing environment incorporating waterblade, bodyjets and overhead shower.

Installation Time - 2 days *(guide only)*

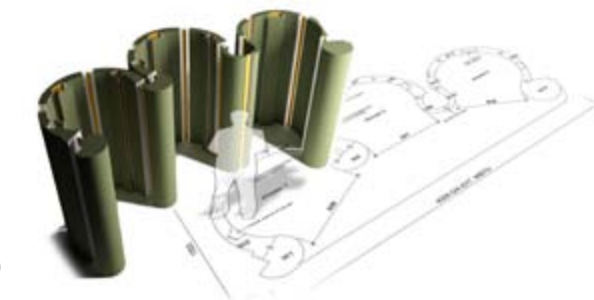

Double Shower


Location

Private Residential

Design Criteria

Twin shower bathing environment incorporating aromatherapy spray, bodyjets and overhead shower

Installation Time - 1 days *(guide only)*

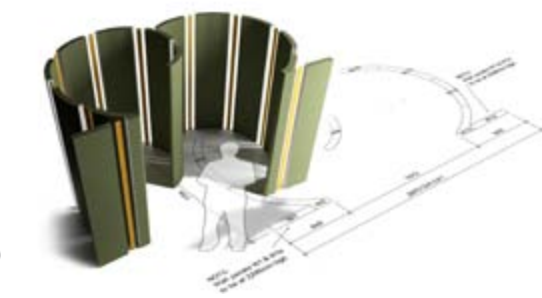

Bespoke structures manufactured upon request.

Please contact head office for more info:

T: +44 (0) 844 335 1136 F: +44 (0) 1942 246 706

www.pcsboard.com